



34935 Flyover Ct. Bakersfield, CA 93308
 Phone: (661) 588-8085 | Fax: (661) 588-8295

INSTALL INSTRUCTIONS:
 UTV Scissors Jack and Mount
 SKU: 599-90684



PARTS LIST FOR SKU: 599-90684

QTY.	PART #	DESCRIPTION
1	2579	Mounting Base for UTV Scissor Jack
1	6393	Eaz-Lift Scissor Jack
2	HARDWARE-13003	13003 1/4 -20X3/4 HCS Z 5
4	HARDWARE-33078	33078 1/4 SAE F/W Z
2	HARDWARE-37260	37260 1/4 -20 Lock Nut Gr C

WARNING

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools, and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.

INTRODUCTION

The Cognito UTV scissor jack kit consists of a mounting base assembled with rubber straps which needs to be installed on the rear bed of UTV for supporting the scissor jack. It also includes the assembled scissor jack and required hardware to install. All provided steel parts are semi-gloss black powder coated.

REQUIREMENTS

- Installation requires a qualified mechanic
- Read instructions carefully and study the pictures before attempting installation.
- 17/64 inch drill bit, 10mm socket, extensions and ratchet/impact gun.


TECHHICAL INFORMATION

- Check the parts and hardware packages against the parts list to assure that your kit is complete before starting
- Each kit, and options to kits, are packaged separately. Therefore installation procedures are covered in separate instructions. Familiarize yourself with each specific set of instructions before beginning.
- Follow the OE specifications when replacing or re-installing OE fasteners, retainers, and hardware specified in the OEM manual

INSTALLATION

1. Align the mounting base with rubber straps side facing rear of the vehicle, approximately 2 inches away from the hole on bed and slightly away from the two slots as shown in figure 1.

Figure 1: Aligning Mounting Base

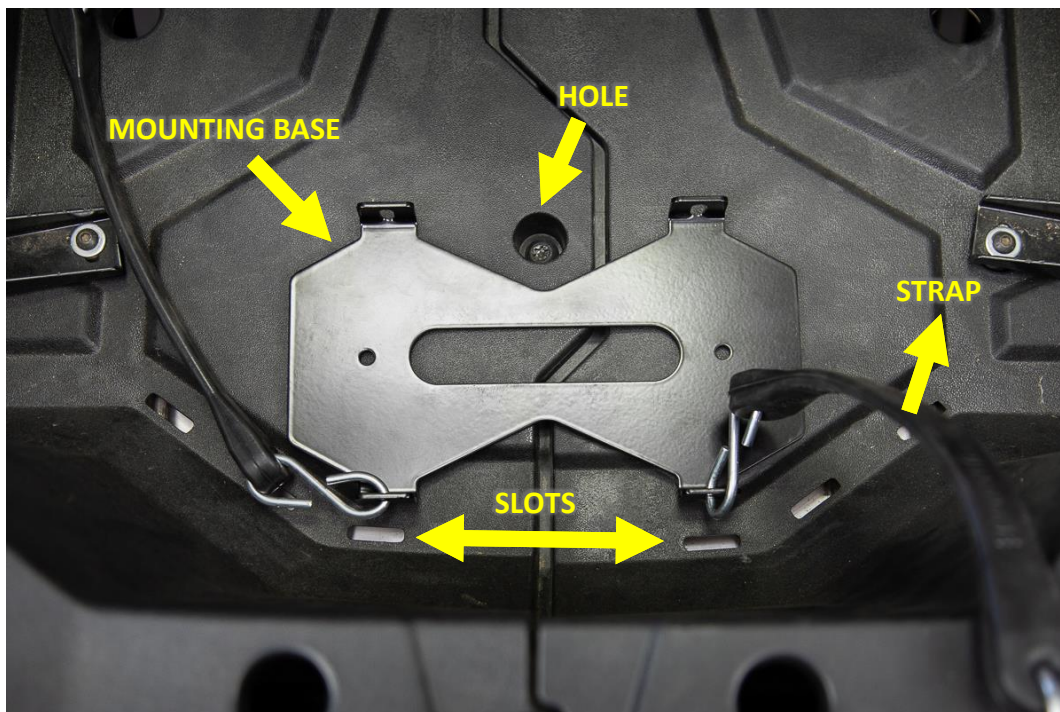


2. The holes on mounting base are marked for drilling using the marker (contrast colored marker works better) as shown in figures 2 and 3.

Figure 2: Positioning Mounting Base for Markings



Figure 3: Markings for Drilling

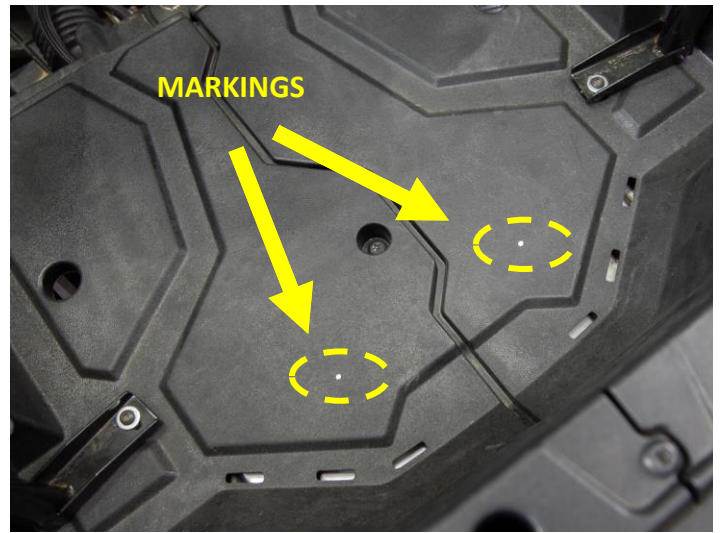


3. Prior to drilling the holes, remove two bolts from the muffler heat shield. Use the 10mm socket, required ratchet, and extensions to remove the bolts. See figures 4 and 5 for reference.

Figure 4: Muffler Heat Shield Bolts (Rear Bumper)



Figure 5: Removing Heat Shield Bolts

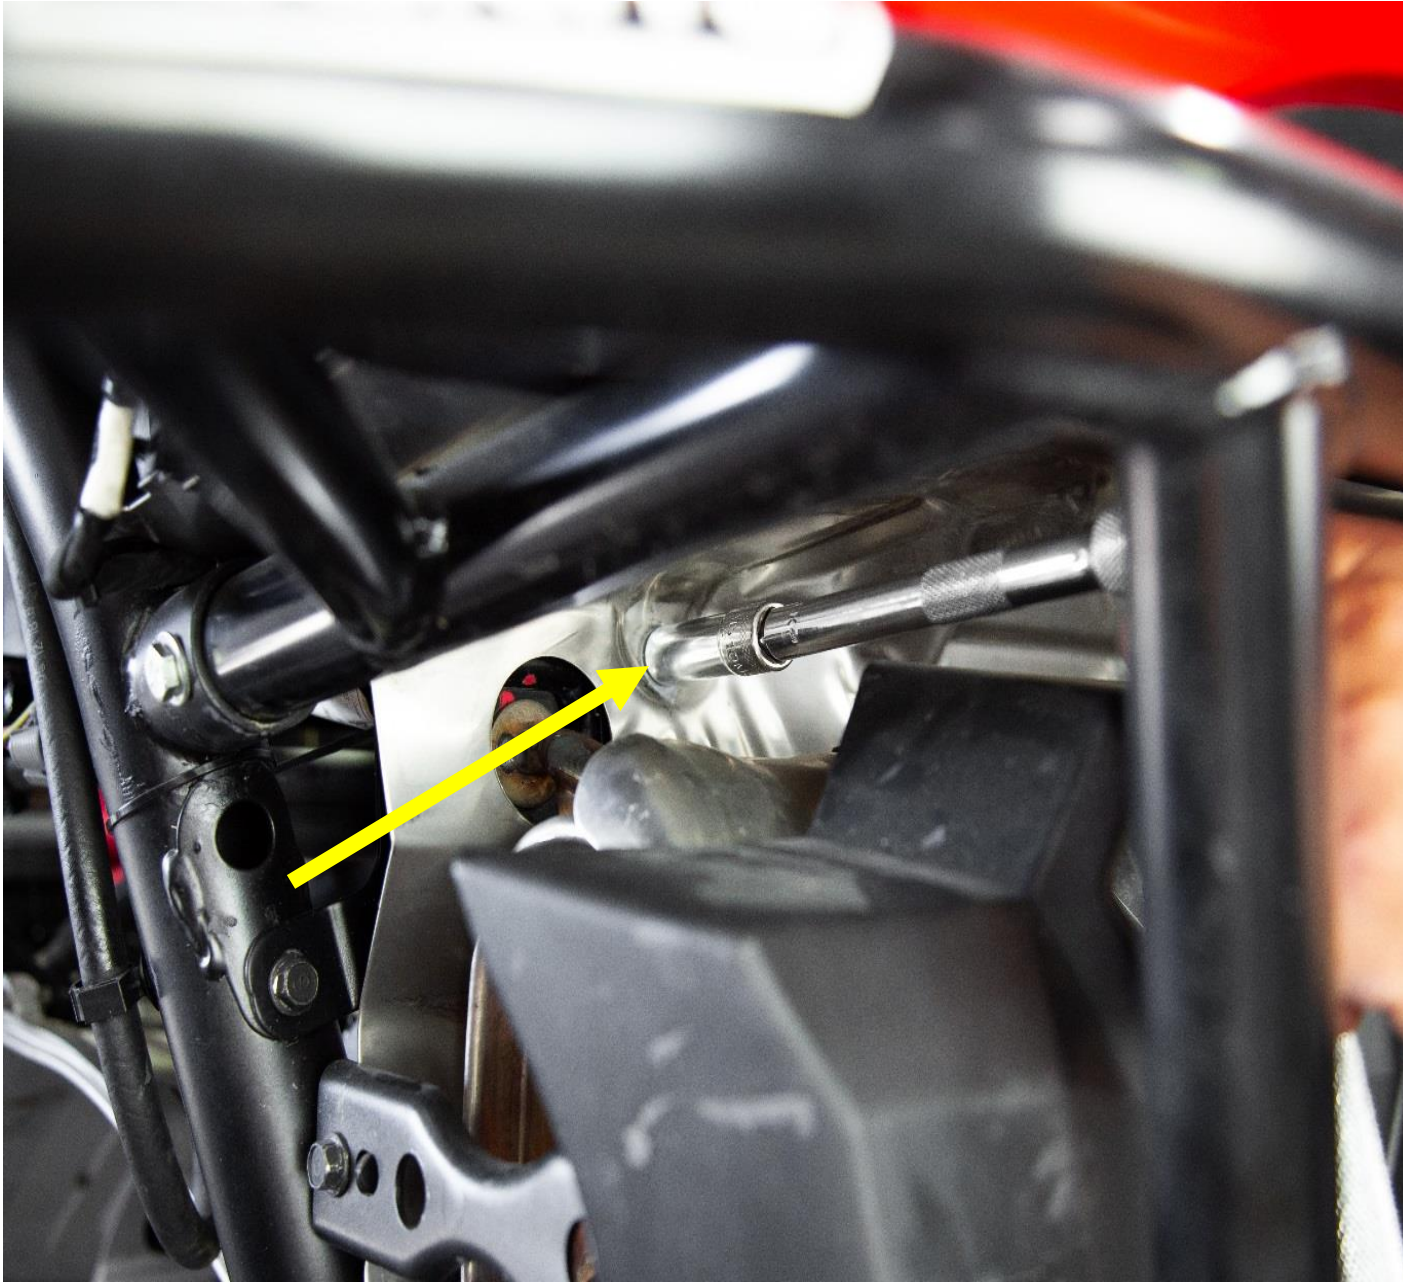


- Use 17/64 in. drill bit, the earlier markings from figure 3 are then drilled as shown in figure 6. The drilled holes are then aligned with the mounting base. Fix mounting base to bed as shown in figure 7, use the provided hardware such as bolts, washers, nuts appropriately. Make room to insert nut by bending the muffler heat shield down and fix bolts from the top using impact gun/ratchet.

Figure 6: Drilling Holes



Figure 7: Fixing Bracket

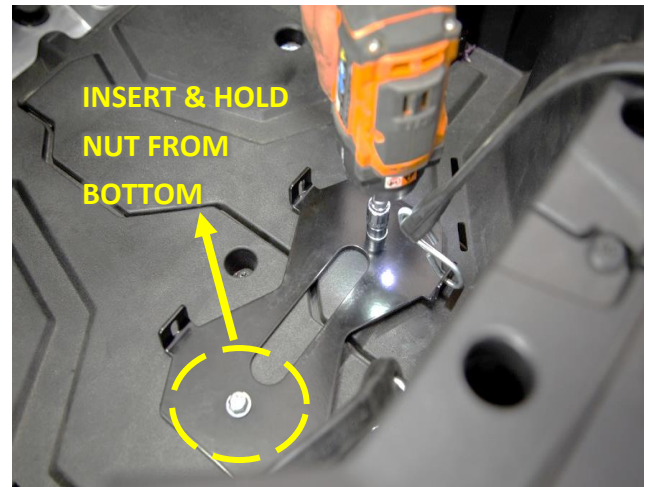


- Now the mounting base is fixed as shown in figure 8, straps facing towards the rear. Place the jack stand over the mounting base and align it with the mounting base so that the mounting bolts sit into the holes on the bottom of the jack. As shown in figure 9, prior to pulling the straps over the raiser pad of the jack stand both the straps hooked to the opposite side.

Figure 8: Installed Mounting Base




Figure 9: Positioning Jack Stand

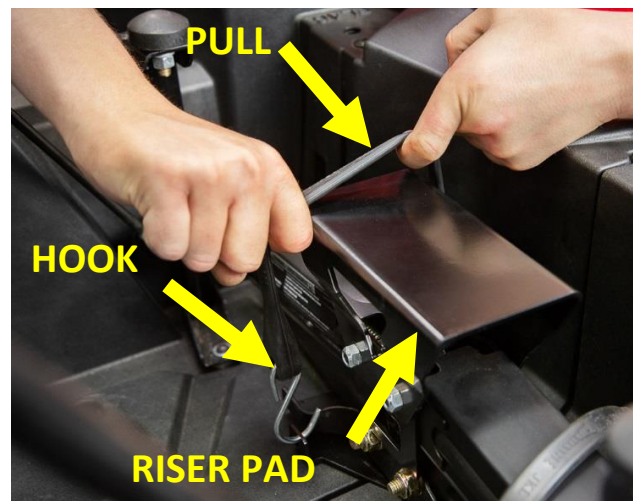

6. The final installation of the UTV Scissor Jack is shown below in figure 10.

Figure 10: Installed UTV Scissor Jack

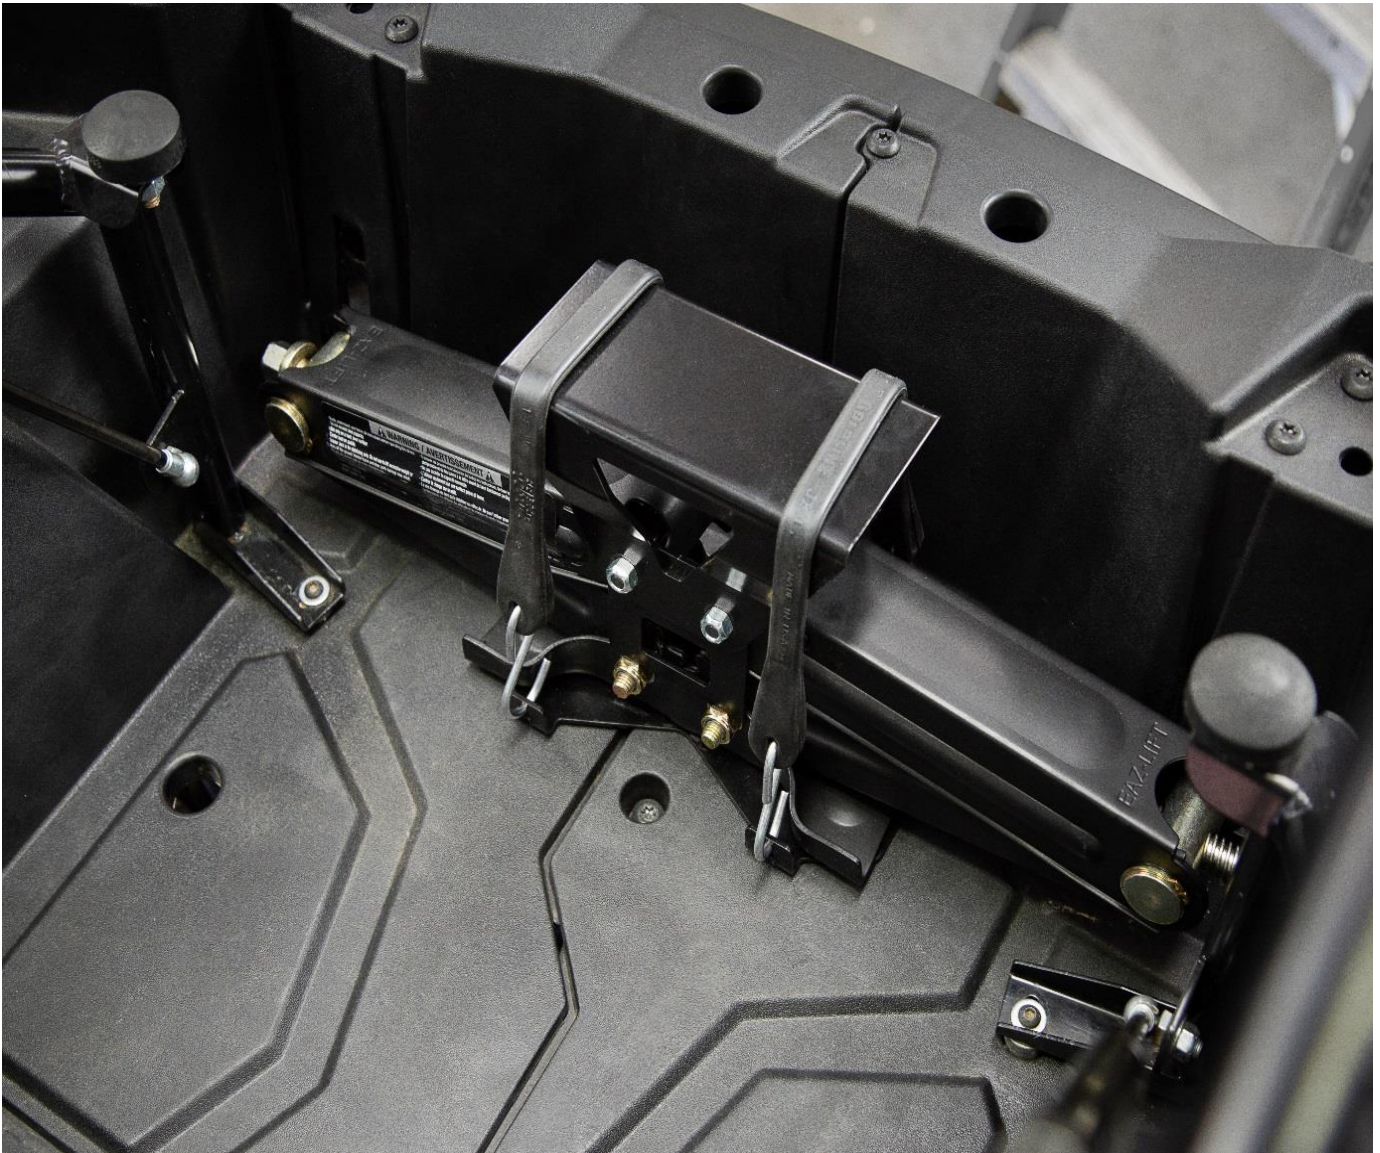

WARRANTY / RETURN POLICY / SAFETY

Cognito Limited Lifetime Warranty

Cognito Motorsports, Inc. hereinafter “Cognito,” warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on “competition” vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito’s obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are “consumables” and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warrantied separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

Return Policy

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

Product Safety Advisory

The installation of Cognito steering and suspension components will modify your vehicle’s original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle’s frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle’s susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle’s ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle’s suspension components and tires.